




Tork Anahtarları - Sistem 5000-3CT - [1 - 800 N.m]

Torque Wrenches - Series 5000-3CT - [1 - 800 N.m]



Sürücü/Drive: S10
Yön Mandallı Cırcır Sürücü
Reversible Ratchet Drive

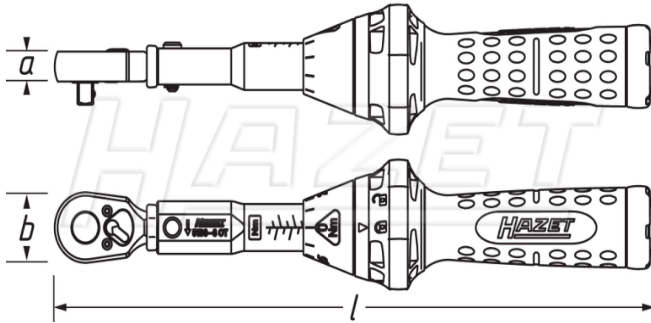

- » Sıkma yönündeki hassasiyet $\pm 3\%$
- » **1 - 800 N.m** aralığında 10 farklı model
- » ISO 6789-2:2017 standardına uygun yapı
- » Sıkma ve sökmeye uygun yön mandallı cırcır
- » Ergonomik tasarımı tutma ve tork ayar kabzası
- » Hafif ve ağır endüstri kullanıma elverişli tasarım
- » Kolay ayarlanabilir, seçilebilir lazer işlemeli skala
- » Hazet fabrika kalibrasyon belgesi ile sevk edilir
- » Türkak akredite kalibrasyon hizmeti opsiyoneldir
- » Türkiye'de, servis yedek parça ve kalibrasyon desteği

- » Accuracy $\pm 3\%$ of scale value
- » 1 - 800 N.m range covered by 10 models
- » Tested in accordance with ISO 6789-2:2017
- » Reversible ratchet and easy to read scale
- » Durable for tightening and loosening operations
- » Torque release palable and audible "click" sound
- » Designed for automotive workshop applications
- » Supplied with house calibration certificate
- » Delivered in protecting plastic safe box

Ayarlanabilir Yön Mandallı Cırcır Kare Sürüclü Tork Anahtarları

Adjustable Reversible Ratchet Drive Torque Wrenches

Parça Part	Tork Aralığı Range	Sürücü Drive	Hassasiyet Accuracy	Cırcır Dişi Ratchet Teeth	Ölçek Increment	Kuvvet* Force*	Ağırlık Weight	Uzunluk (mm) Length		
#	N.m	inch	%	#	N.m	kg	kg	a	b	l
5107-3CT	1 - 9	1/4" - S10	$\pm 4\%$	20	0.10	0.6 - 5.5	0.4	10.2	24	234
5108-3CT	2.5 - 25	1/4" - S10	$\pm 3\%$	20	0.25	1.4 - 15.3	0.4	10.2	24	234
5110-3CT	10 - 60	3/8" - S10	$\pm 3\%$	30	0.50	3.9 - 25.0	0.5	14.5	32	320
5111-3CT	20 - 120	3/8" - S10	$\pm 3\%$	30	1.00	6.9 - 43.5	0.8	14.5	32	375
5120-3CT	10 - 60	1/2" - S10	$\pm 3\%$	30	0.50	3.9 - 25.0	0.5	14.5	32	320
5121-3CT	20 - 120	1/2" - S10	$\pm 3\%$	32	1.00	6.1 - 38.0	1.2	19.6	44	421
5122-3CT	40 - 200	1/2" - S10	$\pm 3\%$	32	1.00	9.4 - 49.5	1.2	19.6	44	519
5123-3CT	60 - 320	1/2" - S10	$\pm 3\%$	32	2.00	11.3 - 62.2	1.5	19.6	44	628
5143-3CT	100 - 400	1/2" - S10	$\pm 3\%$	32	2.50	4.8 - 60.3	3.6	28.5	64	790
5145-3CT	300 - 800	3/4" - S10	$\pm 3\%$	32	2.50	26.2 - 71.0	6.7	28.5	64	1271

*Torkmetreyi kullanırken uygulanan maksimum ve minimum kuvveti temsil eder/ Actuating force minimum and maximum value

