

Air Pump



HYDRAULIC PA6 SERIES

Single-Acting

Compact, lightweight and portable. Single-Speed pumps designed to drive single-acting cylinders.

- The power unit of choice for major manufacturers of auto body, frame straighteners and other equipment.
- Operate at 3-8 bar shop air pressure.
- dBA 85 at 700 bar.
- Serviceable pump motor is not a “throw away”, providing economical repair.
- Permanently vented reservoir cap.
- Internal relief valve protects circuit components, air inlet filter protects motor.

PUMPS

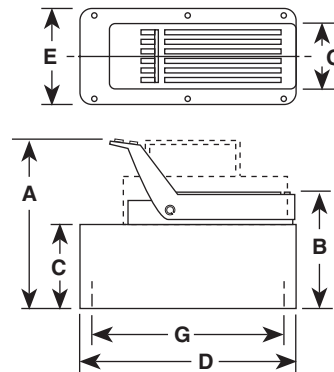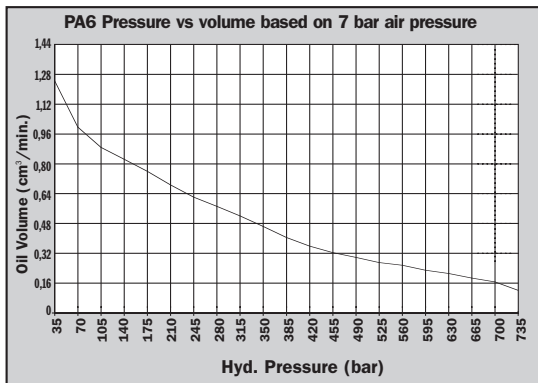


Pump No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)
PA6	197	149	111	241	127	102 x 229
PAGA	197	149	111	241	127	102 x 229
PA6AM	197	149	111	241	127	102 x 229
PA6M	197	149	111	241	127	102 x 229
PAGR	197	149	111	241	127	102 x 229
PA6RM	197	149	111	241	127	102 x 229
PA6M-1	200	152	111	321	187	—
PAGAM-2	254	197	171	292	241	203 x 254
PA6-2	260	203	178	292	241	130 x 181



PA6M-1



PA6-2

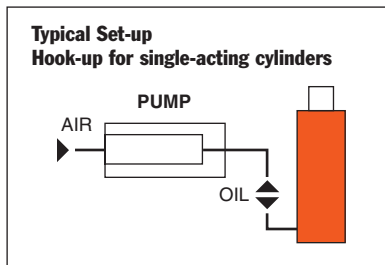

Description	Order No.	Air Supply Req'd (bar)	Reservoir Cap. (l)	Reservoir Usable (l)	Oil Port (in)	Prod. Wt. (kg)
Base model pump with high density polyethylene reservoir.	PA6	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	6,3
PA6 with externally adjustable relief valve.	PA6A	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	6,8
PA6A with metal reservoir.	PA6AM	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	7,7
PA6, except has metal reservoir.	PA6M	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	8,2
PA6 with 3,7m remote control.	PA6R	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	9,3
PA6R, except has metal reservoir.	PA6RM	3-8	1,7	1,6	$\frac{3}{8}$ -NPTF	9,8
PA6, except has 3,8 l metal reservoir.	PA6M-1	3-8	3,8	3,0	$\frac{3}{8}$ -NPTF	10,7
PA6, except has 7,6 l high density polyethylene reservoir.	PA6-2	3-8	7,6	7,3	$\frac{3}{8}$ -NPTF	11,1
PA6, except has 9,5 l metal reservoir.	PA6M-2	3-8	9,5	9,1	$\frac{3}{8}$ -NPTF	14,5

